

# Henkovac Mobile Range

1st choice for professionals within  
the food and packaging industry



M4 - M5 - M6 - M7 - M8

# Mobile Range



## Specifications

M4

M5

M6

STAINLESS STEEL COVER | FLAT WORKING SURFACE

Seal	Double	Double
Machine dimension mm	740 x 760 x 1130	940 x 870 x 1140
Standard voltage	400 - 3 - 50 Hz	400 - 3 - 50 Hz
Digital Time Control	10 programs	10 programs
Pump Capacity	40 m3	63 m3
Average weight	192 kg	308 kg

## Options

Filler plates / Liquid filler plates	Yes	Yes
Sensor control	Sensor / H <sub>2</sub> O	Sensor / H <sub>2</sub> O
Soft Air	Soft Air	Soft Air
Seal	Trenn (pre-cut) / 1-2 / Bi-Active	Trenn (pre-cut) / 1-2 / Bi-Active
Gas	Gas	Gas
Pump upgrade	63 m3	100 or 160 m3
Voltage according to Pump upgrade	400 - 3 - 50 Hz	400 - 3 - 50 Hz



STAINLESS STEEL COVER | FLAT WORKING SURFACE

Seal	Double
Machine dimension mm	1180 x 860 x 1140
Standard voltage	400 - 3 - 50 Hz
Digital Time Control	10 programs
Pump Capacity	100 m3
Average weight	360 kg

Filler plates / Liquid filler plates	Yes
Sensor control	Sensor / H <sub>2</sub> O
Soft Air	Soft Air
Seal	Trenn (pre-cut) / 1-2 / Bi-Active
Gas	Gas
Pump upgrade	160 or 300 m3
Voltage according to Pump upgrade	400 - 3 - 50 Hz



## Seal configurations

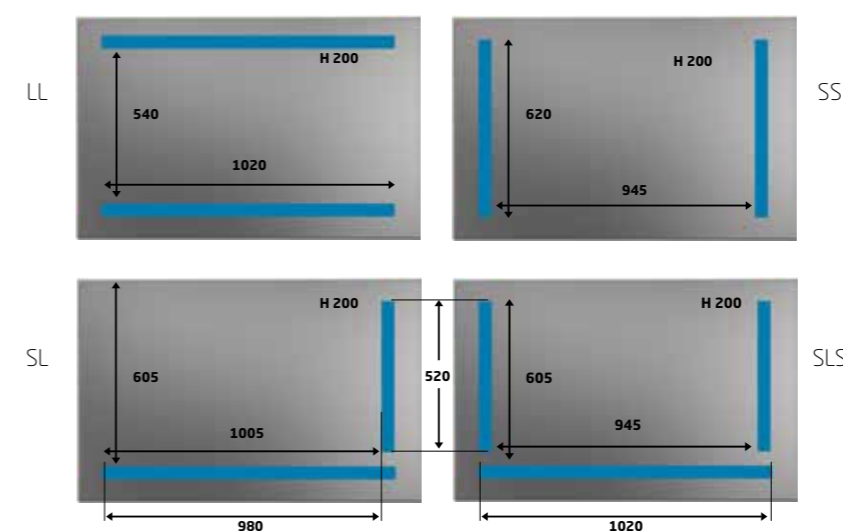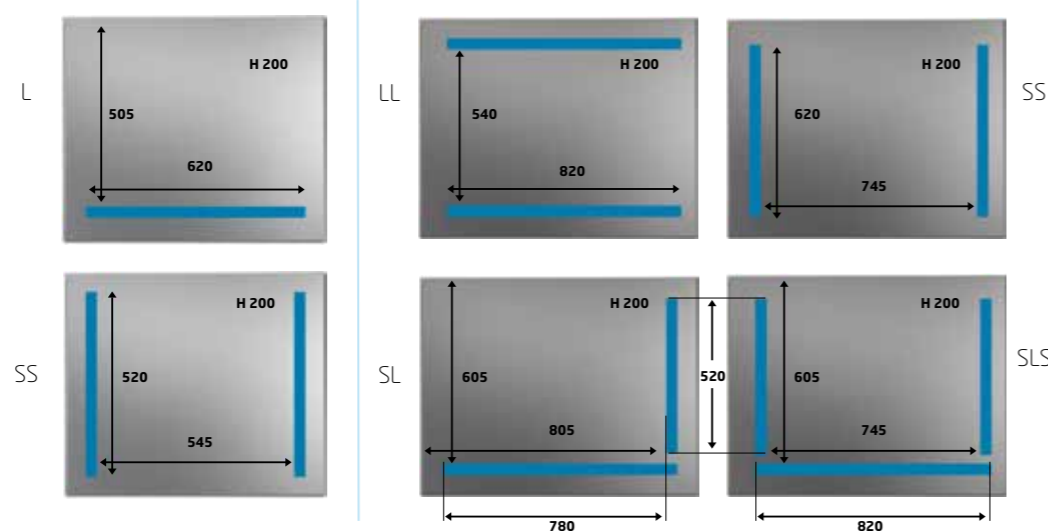

# Mobile Range



## Specifications

M7

M8

ALUMINUM COVER | CHAMBER

Seal	Double	Double
Machine dimension mm	700 x 680 x 1040	910 x 830 x 1060
Standard voltage	400 - 3 - 50 Hz	400 - 3 - 50 Hz
Digital Time Control	10 programs	10 programs
Pump Capacity	40 m <sup>3</sup>	63 m <sup>3</sup>
Average weight	160 kg	228 kg

## Options

Filler plates / Liquid filler plates	Yes	Yes
Sensor control	Sensor / H <sub>2</sub> O	Sensor / H <sub>2</sub> O
Soft Air	Soft Air	Soft Air
Seal	Trenn (pre-cut) / 1-2 / Bi-Active	Trenn (pre-cut) / 1-2 / Bi-Active
Gas	Gas	Gas
Pump upgrade	63 m <sup>3</sup>	100 m <sup>3</sup>
Voltage according to Pump upgrade	400 - 3 - 50 Hz	400 - 3 - 50 Hz

## Seal configurations

